



Drinking water Quality analysis of Water supply network at Ghanish valley Hunza-Nagar Gilgit-Baltistan, Pakistan

Ajaz Ali^{1,2*}, Khadim Hussain¹, Syed Jarrar Hussain¹, Nasir Hussain¹

¹Environmental Protection Agency, Gilgit-Baltistan, Pakistan

²Department of Environmental Sciences Karakorum International University, Gilgit-Baltistan, Pakistan
ajazenvironment@gmail.com

Available online at: www.isca.in, www.isca.me

Received 29th September 2015, revised 8th November 2015, accepted 3rd December 2015

Abstract

The drinking water quality of water supply network of Ghanish valley Hunza-Nagar has been studied. Water quality testing along with sanitary inspection of the entire distribution network was carried out during the last week of July, 2011. The various constituents monitored include the physio-chemical characters like pH, turbidity, temperature, color, odor and taste, electrical conductivity, total dissolved solids; chemical parameters include nitrate and nitrite; and microbiological parameters like *E. coli* count. Waqtech water testing kit was used for microbiological analysis which employs the membrane filtration technique. Chemical parameters were analyzed by using Photometer. Results obtained from assessment of different physio-chemical parameters were as follows. Temperature value fluctuate between 16-25 °C, turbidity levels were 200-500 NTU, pH ranged from 7-8.3, Electrical Conductivity ranged from 200-400 µS/cm, TDS values were 208-580 ppm, and *E. coli* (colonies) were 6-17 at different sampling locations. Nitrate concentration was 20.3-49.0 and nitrite was 1.0-2.9 respectively. Results showed that all the samples taken from water distribution network were bacteriologically contaminated with *E. coli* (colonies) an indicator organism of water borne diseases, falls in high risk category according to WHO guidelines and not fit for human consumption. During the sanitary inspection it was found that the sewage collection system, the main sewer of Karimabad is very close (4 to 5 feet), and on the upstream drinking water supply channel of Union Council Ghanish. Due to choking of manholes of sewers of Karimabad, the sewage enter into the water supply channel of Ghanish making it contaminated bacteriologically and thus become source of water borne disease. It was found that design of Karimabad sewage system is faulty, improper operation and maintenance and lack of technical expertise make it a health hazard for the people of Ghanish valley. During summer due to tourist influx, the main sewer use to choke twice in a month and majority of tourists belong to western countries that may spread new strains of microorganisms and subsequently new episodes of outbreaks in the respective village.

Keywords: Drinking Water Quality, *E. coli*, turbidity, World Health Organization, Environmental Protection Agency.

Introduction

High-quality and enough water supply services are most important requirement for community health and well being¹. Many water resources in developing countries are unhealthy because they contain harmful physical, chemical and biological agents². Microbiological water quality is weakening day by day due to unplanned industrialization, urban sprawl, reckless development, and faulty water distribution systems³. Such kind of microbiological contamination has been reported worldwide⁴. Drinking water protection is a worldwide worry. Drinking water usually has a physically powerful impact on the public health because water play major role in the spread of disease causing microorganisms which are liable to cause diseases in people⁷. Water is considered to be safe if it has no significant health risk over lifetime consumption⁸. Unfortunately, many people in the world are deprived of this basic need. The condition in developed countries is not severe as 95 % of the inhabitants has access to clean drinking water and 90 % of the inhabitants has sufficient disposal facilities⁹.

The impact of safe drinking water supply and sanitation facilities can help in avoiding water and sanitation related diseases^{10, 11}. Drinking water being distributed by municipality to the community is frequently infected with communicable microorganisms or harmful chemicals¹². The United Nations has anticipated that at least 2.5 billion people in developing countries have no suitable hygienic system and over 780 million have no right to use harmless drinking water¹³. As a result, about 2.3 billion people across the world are experiencing from water related diseases¹⁴. Outbreaks of *E. coli* have been evident from many countries owing to contamination of drinking water and food¹⁵.

Resembling to other developing countries drinking water quality is main issue in Pakistan and it stands at 80th position among 120 nations¹⁶. Bacteriological contamination has been considered as most important drinking water difficulty in Pakistan¹⁷. In Pakistan water related disease (diarrhea) is commonest illness which is come across more or less by every

person at least once a year^{18, 19}, and 30-50% of hospital entrance are due to diarrhea^{20,21}. Unequal water delivery is widespread in urban areas and outbreaks of gastroenteritis and other water born diseases has become an ordinary characteristic²². According to Pakistan Millennium Development Goals Report, 2006²³, in Pakistan water delivery coverage through piped network and hand pumps is around 66%. Global Water Partnership Report, 2000²⁴ anticipated that, in Pakistan, 30% of all diseases and 40% of all deaths are due to deprived water quality.

The Gilgit-Baltistan of Pakistan is mountainous, and its public face health exposures because of deprived sanitation practices, i.e. lacking sewage treatment or use of latrines, lack of cleanliness education, and use of extremely dirty water. Parasitic and bacterial gastrointestinal illnesses are frequent, and sometimes eruptions occur²⁵. Thus the present study was carried out to check the drinking water quality status of water supply networks of Ghanish valley Hunza.

Material and Methods

For microbiological analysis of water samples Waqtech Water Testing Kit was used which employ the membrane filtration technique and membrane Lauryl sulphate broth as medium. With the help of Vacuum Pump a 100ml volume of water was sucked through the membrane (fitted in the sterile membrane unit). In sterile Aluminum Petri Dish the membrane was then placed on the absorbent pad saturated with Membrane Lauryl Sulphate Broth. The plates were than incubate for 18 hours at 40-44 C. All yellow colonies on the membrane were counted and reported after incubation period in per 100 ml of water. Electrical conductivity and Total dissolved solids was measured with TDS meter. pH was measured by pH meter and turbidity was measured with turbidity tubes provided with the Waqtech Water Testing Kit. These tubes are graduated with logarithmic scale and cover the range 5 to 2000 NTUs.

Table-1
Showing detailed results of different sampling locations at the study area

Sampling Location	Parameters Tested and Permissible limits set by WHO										
	Temp °C	pH 6.5-8.5	Turbidity <5NTUs	E. coli 0col/100ml	EC 400µS/cm	TDS 1000ppm	Color	Odor	Taste	Nitrate ≤ 50	Nitrite ≤ 3
Tank inlet	23	7.8	400	11	300	400	No obj	No obj	No obj	22.5	2.3
Outlet	21	7.5	450	9	250	290	No obj	No obj	No obj	20.3	2.7
Hotel tape	18	7.3	300	7	200	580	No obj	No obj	No obj	34.9	2.1
House tape L 1	18	7.7	200	7	210	408	No obj	No obj	No obj	45.0	2.9
House Tape L 2	16	7.2	270	6	350	380	No obj	No obj	No obj	35.5	1.8
House Tape L 3	20	7.0	250	8	400	295	No obj	No obj	No obj	48.1	1.2
House Tape L 4	16	7.1	280	7	300	406	No obj	No obj	No obj	32.7	1.0
House Tape L 5	16	7.8	200	7	200	208	No obj	No obj	No obj	47.6	2.0
Water tank	25	7.6	500	17	250	370	No obj	No obj	No obj	21.8	2.7
House Tape L 6	22	8.1	200	12	210	402	No obj	No obj	No obj	22.0	1.9
House Tape L 7	15	8.3	490	10	400	429	No obj	No obj	No obj	49.0	2.7
Ghanish proper House Tape	16	7.8	400	6	300	356	No obj	No obj	No obj	42.7	1.7

Results and Discussion

Comparative results are given in Table-1.

Discussion: Temperature: The range of water temperature during the present study was in between 16-25 °C (Fig 1). The temperature of drinking water is often not a most important concern to consumers especially in terms of drinking water quality. There are no set guidelines for drinking water temperature therefore quality of water with respect to temperature are generally left to the individual taste and

preference²⁶.

Turbidity: According to USEPA, 2003²⁷ turbidity may specify the existence of disease causing organisms. These organisms consist of bacteria, viruses, parasites that can cause nausea, cramps, diarrhea and related headaches. Turbidity values recorded in the present study ranged from 200-500 NTUs (Figure-2) thus exceeding the WHO limits of <5NTUs and showing clear chances of disease causing organisms that have been shown in analyzed water samples which are contaminated with E. coli (colonies).

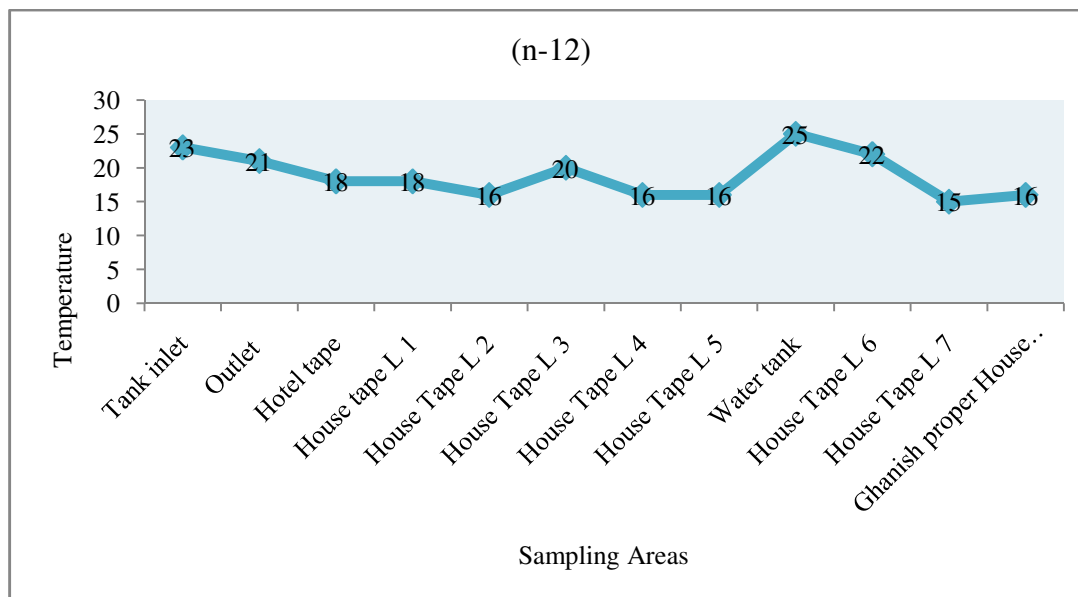


Figure-1
 Showing temperature values at different sampling Locations of the study area

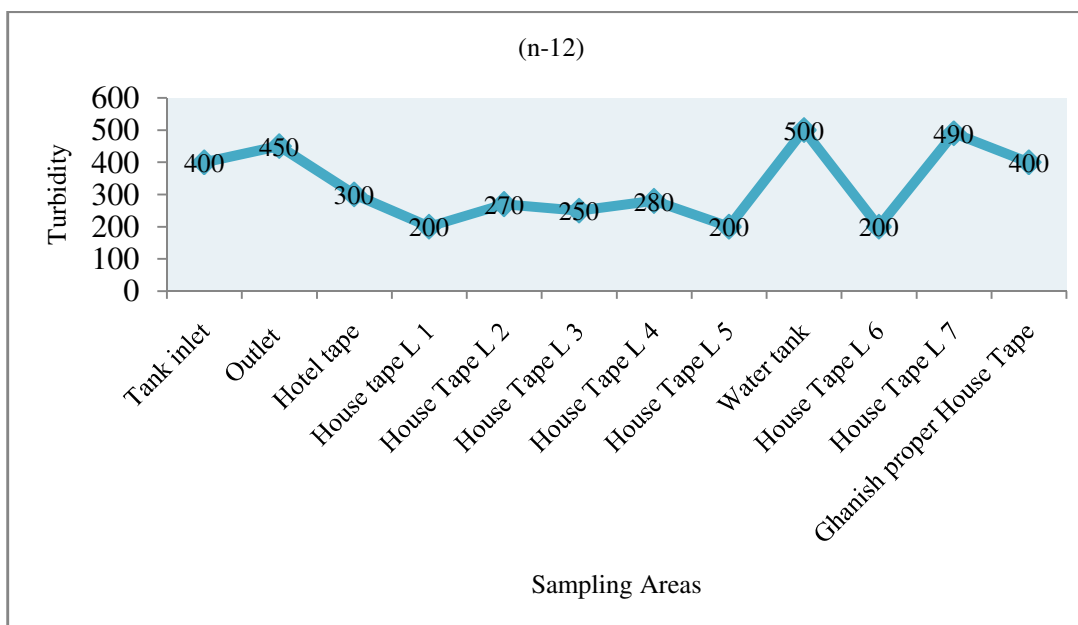


Figure-2
 Showing turbidity values at different sampling locations of the study area

pH: In determining the acidic nature of water pH is mainly essential²⁸. pH values ranged between 7-8.3 (Figure-3) thus within the prescribed limits set by WHO. These results are similar to the other studies²⁹⁻³².

E. coli: Being more restricted to feces of human and warm-blooded animals E. coli is considered to be a better indicator of fecal contamination³³. E. coli is the major species in the fecal coliform group and are generally undamaging but some strains

may cause severe illness (e.g., E. coli 0157:H7)³⁴. E. coli must not be detectable in 0/100 ml of water according to WHO guidelines for drinking water quality but in the present study number of E. coli (colonies) ranged from 6-17 (Figure-4) at different sampling points thus exceeding the WHO guidelines and falls in high risk category and not fit for human consumption. The results for microbiological analysis were similar to that of related studies conducted by various researchers³⁵⁻³⁸.

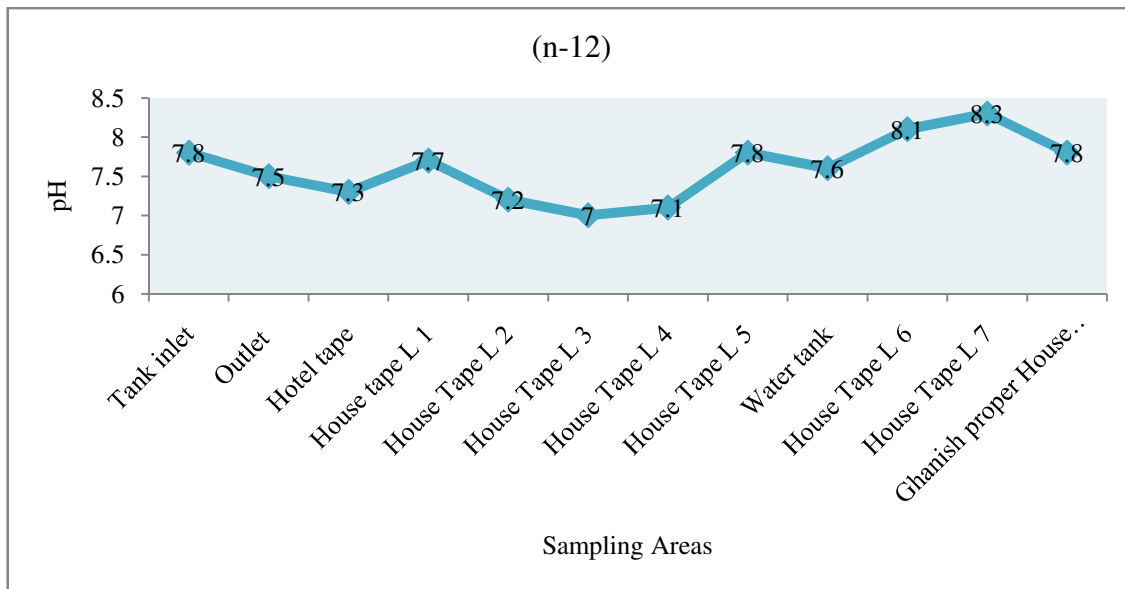


Figure-3
 Showing pH values at different sampling Locations of study area

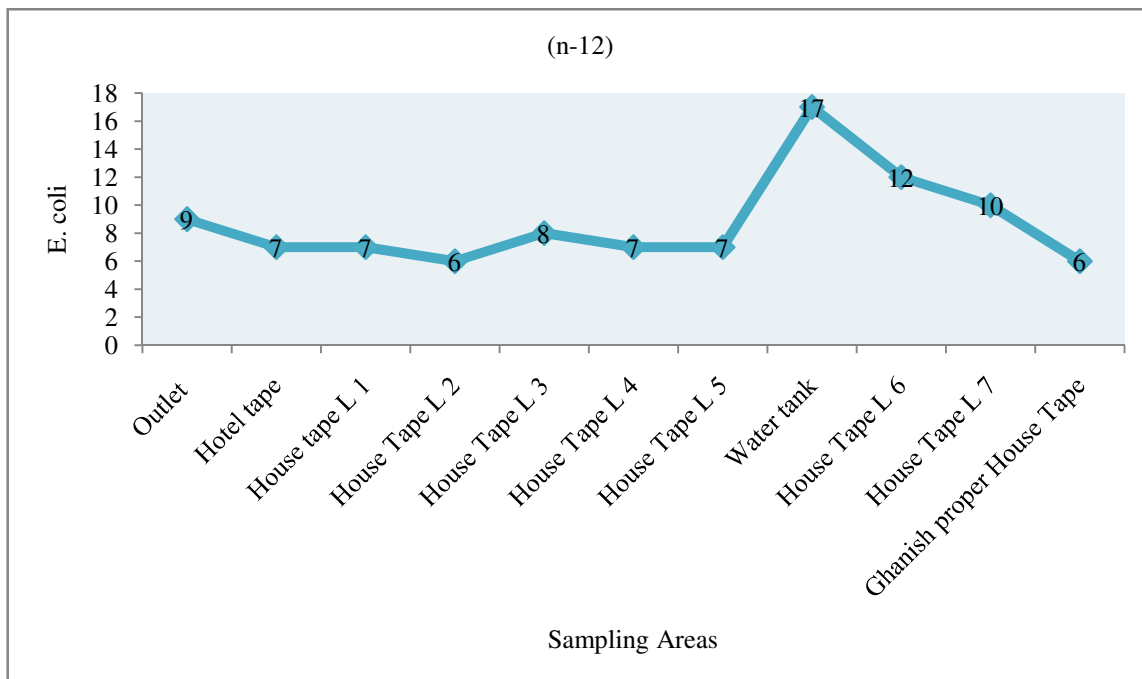


Figure-4
 Showing number of E. coli (colonies) found at different sampling locations

Electrical Conductivity: A quick and easy mean of assessing the concentration of electrolytes in water is the determination of electrical conductivity. It would be stronger as greater will be the dissolved solids³⁹. Electrical conductivity value recorded in the current study was 200-400 $\mu\text{S}/\text{cm}$ (Figure-5). These values were not high compared with WHO guidelines values of 400 $\mu\text{S}/\text{cm}$. Many researchers⁴⁰⁻⁴² found similar electrical conductivity values which were within the permissible limits of WHO guidelines of 400 $\mu\text{S}/\text{cm}$.

Total Dissolved Solids: A general indicator of overall water quality is Total Dissolved Solids. It determines inorganic and organic materials dissolved in water. Higher TDS levels may tell about bad odor or taste to drinking water, but also cause scaling of pipes and rusting⁴³. WHO permissible limits for TDS is 1000 ppm and in the present study TDS values ranged between 208-580 ppm (Figure-6) thus within the prescribed limits set by WHO. Total Dissolved Solids values were in agreement with the other studies carried⁴⁴⁻⁴⁶.

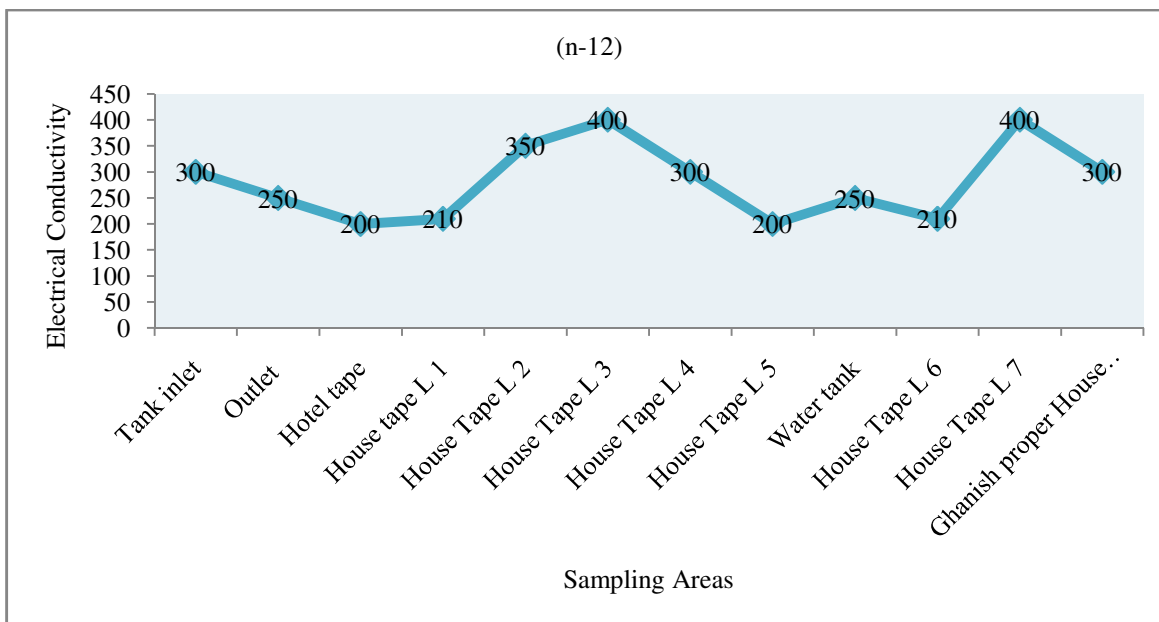


Figure-5
 Showing EC values at different sampling locations of the study area

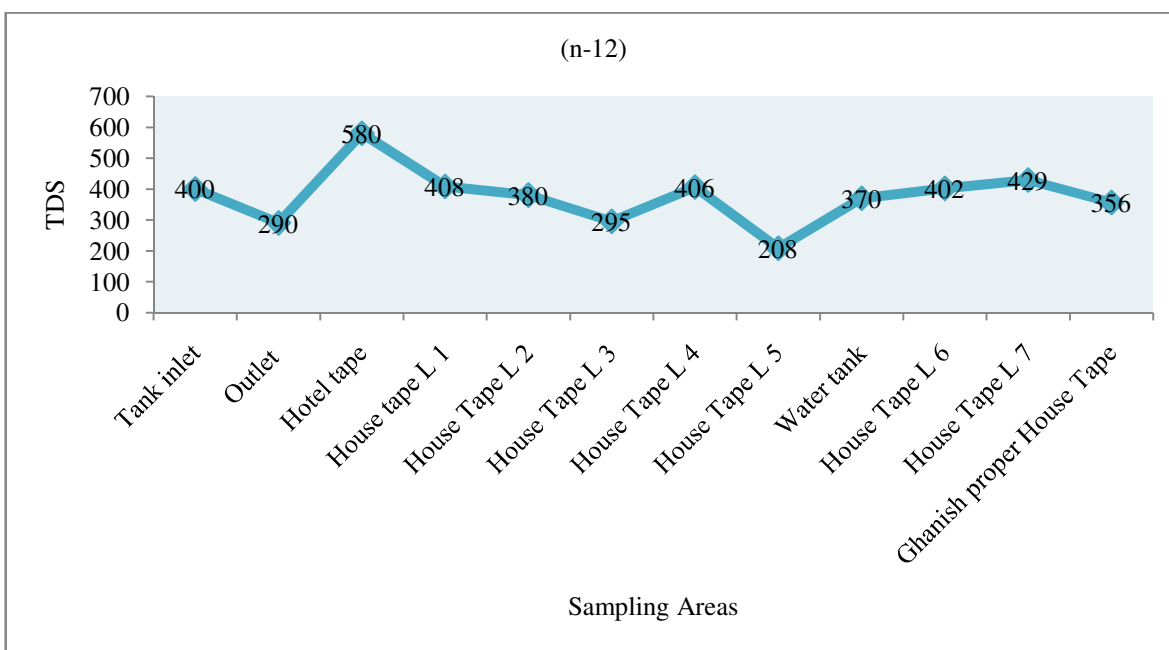


Figure-6
 Showing TDS values at different sampling locations of study area

Nitrate: 15 - 75% of nitrate from drinking water accounts for person's contact to nitrate from environmental resources. A large number of diseases like dizziness, abdominal disorder, vomiting, and weaknesses, high rate of palpation, mental disorder and even stomach cancer etc. are caused by the use of nitrate rich water. Reddy⁴⁸⁻⁵⁰. Nitrate concentration in the current study ranged from 20.3-49.0 (Figure-7) and thus within the permissible limits of WHO guidelines for drinking water quality.

Nitrite: Nitrite concentration in the present study was 1.0-2.9 mg/L (Figure-8) and thus within the range of WHO guidelines of ≤ 3 mg/L. Nitrite ions are formed from the nitrate or the ammonium ions by certain micro-organisms found in soil, water, sewage and digestive tract. In infants under three months of age the reaction of nitrite with hemoglobin can be risky. Absorption over 1 mg/L waters with nitrite nitrogen should not be used for infants' feedings. Similarly waters with considerable nitrite absorption generally would be deeply polluted most likely bacteriologically un-acceptable⁵¹.

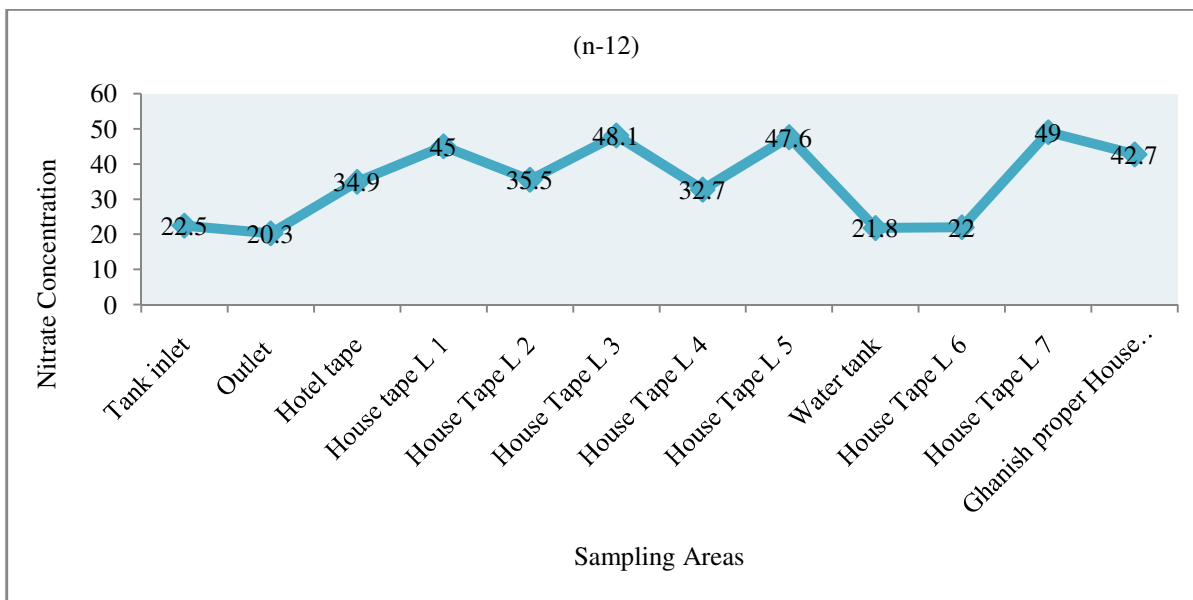


Figure-7
 Showing nitrate concentration at different sampling locations of study area

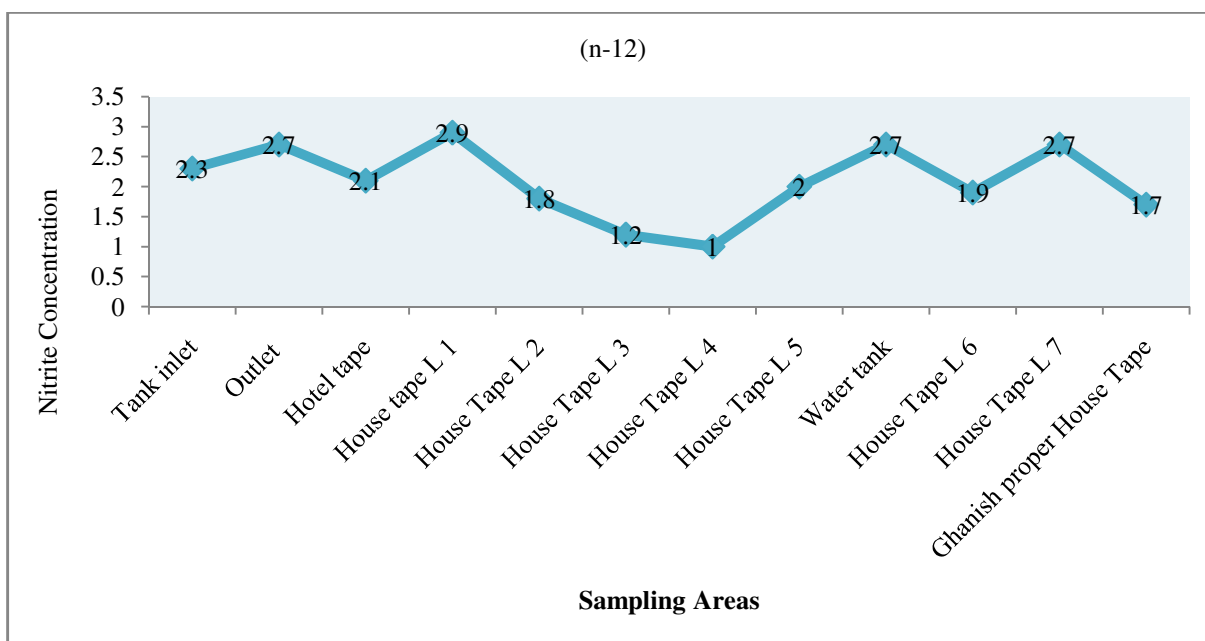


Figure-8
 Showing nitrite concentration at different locations of study area

Conclusion

Sanitary inspection and microbiological analysis of the entire distribution network revealed that the sewage collection system, the main sewer of Karimabad is very close to (4 to 5 feet) and on upstream to the drinking water supply channel of union council Ghanish. Due to choking of manholes of sewers of Karimabad, the sewage enters into the water supply channel of Ghanish valley, making it bacteriologically contaminated and thus become the source of water borne diseases. It is also found that design of Karimabad sewage system is faulty, improper operation and maintenance and lack of technical expertise make it a health hazard for the people of Ghanish valley. During summer tourist influx may also spread new strains of microorganism and subsequently new episodes of outbreaks in the respective village.

Recommendations: Following recommendations are suggested: The sewage system that is close to the main supply water channel should properly be managed and operated by technical experts so that chances of contamination to water should be minimized. Protection of water supply system of village is needed on emergency basis with provision of pipelines from source to water storage tanks and re-alignment of sewage system below existing water channel. During peak season main water storage tanks should be de contaminated using chlorine twice a year. Sufficient amount of chlorine should be stored at community water supply systems in order to avoid future water borne epidemics.

Acknowledgement

We highly appreciate the cooperation of Assistant Director Lab/NEQS and Scientific Officer Environmental Protection Agency for guidance and support throughout the research work.

References

1. Eassa A.M. and Mahmood A.A. (2012). An assessment of the treated water quality for some drinking water supplies at Basrah. *J. Basrah Res. (Sci.)*. 38(3): 95-105.
2. WHO (2011). Manganese in drinking water. Background document for development of WHO Guidelines for drinking water quality. WHO/SDE/WSH/03.04/104/REV/1.http://www.lwb.mw/online_watermonitoring.htm.
3. Varale A and Varale Y. (2012). Residual chlorine concentrations in underground water samples collected from tube wells of Nipani Town. *Univers. J. Environ. Res. Technol.* 2(1), 105-107.
4. Dowidar A, Yosef YA, Merdan Al, Abdel-Monem MH and Diab AM. (1990). Bacterial contamination of water wells in Wadi el-Sheikh Area, in Southern Sinai. *J. Egypt Public Health Assoc.* 65, 119-34.
5. Mroz Jr. R.C. and Pillai S.D. (1994). Bacterial populations in the ground water on the US- Mexico border in El Paso Country, Texas. *South Med. J.*, 87, 1214-1217.
6. Appleyard S.J. (1996). Impact of liquid waste disposal on portable ground water resources near Perth, Western Australia. *Environ. Geol.* 28, 106-10.
7. Howard G. and Bartram I. (2005). Effective Water Surveillance in Urban Areas of Developing Countries. *Journal of Water and Health.* 03(1) 234-244.
8. WHO (2011). Guidelines for drinking-water quality 4th ed. World Health Organization, Geneva.
9. Amin R, Ali SS, Anwar Z and Khattak JZK. (2012). Microbial analysis of drinking water and water distribution system in new urban Peshawar. *Curr Res J Bio Sci.*, 4, 731-737.
10. Boot and Cairncross A.M. (1993). The study of hygiene behavior in water and sanitation projects. Irc, the Netherlands and London school of hygiene and tropical medicine.
11. Gorter A. and Sandiford P.A. (1997). Literature review of the health impact of water supplies, sanitation and hygiene on the incidence of diarrheal diseases. Chaep 3 in Childhood Diarrhea and its prevention in Nicaragua. Vormgeving en drukwerk, Uniigraphic, Universities Maastricht.
12. WWF (2007). Pakistan's waters at risk Water and health related issues in Pakistan and key recommendations. pp. 1-33.
13. UNISEF and WHO (2012). Progress on drinking water and sanitation update. Retrieved from; <http://www.unicef.org/media/files/JMPreport2012.pdf>.
14. UNESCO (2003). Water for people water for life. The United Nations world water development report. United Nations Educational, Scientific and Cultural Organization.
15. Ogden L.D., Fenlon D.R., Vinten A.J. and Lewis D. (2001). The fate of Escherichia coli 157 in soil and its potential to contaminate drinking water. *Int. J. Food Microbial.* 66, 111-117.
16. Azizullah M.N.K., Khattak P. Richter and D.P. Hader (2011). Water pollution in Pakistan and its impact on public health—A review. *Environment International*, 37(2), 479-497.
17. PCRWR (2004). Water Quality Profile of Pakistan (22 Cities) Report (Phase-III) 2003- 2004. Pakistan Council for Research in Water Resources, Islamabad.
18. Hafiz S., Syed Y., Rauf U., Qadr B. and Shahabuddin M. (1991). Etiolog, and management of diarrheal diseases in Karachi. *J. Pakistan Med. Assoc.*, 41, 211-213.
19. Karamat K.A., Malik I.A., Nabi Qamar R.H., Qureshi A.H. and Saleem S. (1993). Study of enteropathogenic

- microbial agents of diarrheal diseases in Rawalpindi/Islamabad. *Pakistan J. med. Res.*, 32, 139-142.
20. Imran M. (1978). Etiology of gastroenteritis at Lady Reading Hospital, Peshawar. *Proc. Biennial Pediatr. Conf.*, 4, 31-34. Peshawar, March 24-27.
21. Haque S. and ALI M. (1986). Risk factors in the post diarrheal abdominal distention. *Pakistan Pediatr. J.*, 10: 43-48.
22. G. Bridges (2007). Asian Water Development Outlook. Country Paper Pakistan, Asian Development Bank, 2007. <http://www.adb.org/Documents/Books/AWDO/2007/cr08.pdf> (December 29, 2008).
23. Pakistan Millennium Development Goals Report (2006). Government of Pakistan. Planning Commission. (2006)75. <http://www.undp.org.pk/uploaddocuments/mdg2006.zip>. (December 23, 2008).
24. Global Water Partnership (2000). Draft South Asia - Water Vision 2025, Country Report – Pakistan.
25. Waqar SN, Hussain H, Khan R, Khawaja A, Majid H and Malik S *et al.* (1999). Intestinal parasitic infections in the pediatric population of two high land communities from northern Pakistan (abstract). *Proc Pakistan Cong Zool*, 20, 125-6.
26. Jayaraman P.R.T., Ganga Deyi and Nayar T.V. (2003). Water quality studies on Karamana River, Thiruvananthapuram District South Kerela, India. *Pollution Research*. 22(1), 89-100.
27. United States Environmental Protection Agency (2003). Chemical contaminants in drinking water. Technical fast sheet on microbes. EPA 816-03-016.
28. Gupta D.P. Sunita and J.P. Saharan (2009). Physicochemical analysis of ground water of selected area of Kaithal city (Haryana), India. *Researcher*, 1(2), 1-5.
29. Raza A., Ali S., Abbas Y., Ali S., Karim R., Ali N. and Ali A. (2015). Physio-chemical and biological drinking water quality analysis of Barmus water supply Complex Gilgit. *J. Bio. and Env. Sci.*, 7(4), 127-134.
30. Ali S., Ali A., Hussain A.S., Hussain K., Begum F., Akbar M., Raza G., Ali K. and Hyder S. (2015). Functional status and water quality analysis of 56 water purification plants established at Gilgit district. *J. Bio. and Env. Sci.* 6(4): 332-340.
31. Inam Ullah E. and Alam A. (2014). Assessment of drinking water quality in Peshawar, Pakistan. *Bulg. J. Agric. Sci.*, 20, 595-600.
32. Farooq S., Hashmi I., Qazi I.A., Qaiser S. and Rasheed S. (2008). Monitoring of coliform and chlorine residual in water distribution network of Rawalpindi. *Environmental Monitoring and Assessment*, 140(1-3), 339-347.
33. Edberg S.C., Rice E.W., Karlin R.J. and Allen M.J. (2000). *Escherichia coli*: The best biological drinking water indicator for public health protection. *Symp. Ser. Soc. Appl. Microbiol.* (29):106S-116S.
34. Odonkor S.T. and Ampofo J.A. (2013). *Escherichia coli* as an indicator of bacteriological quality of water: An overview. *Microbiol Res.* 4(e2), 5-11.
35. Jehangir M. (2002). Bacteriological Contamination and Upward Trend in Nitrate Contents, observed in Drinking Water of Rawalpindi and Islamabad. The Network Consumer Protection in Pakistan.
36. Sumera N. and Shedayi A.A. (2010). Analysis of Microbial and Physico-Chemical Parameters of Drinking Water of Oshikhandas Village, Gilgit- Baltistan, Pakistan. Convention on Climate Change and its Impact on Biological Diversity in Gilgit – Baltistan, Pakistan. 33.
37. Shedayi. A.A, Jan N., Riaz S. and Xu. M. (2015). Drinking water quality status in Gilgit Pakistan and WHO Standards. *Sci. Int (Lahore)*, 27 (3), 2305-2311.
38. Sun O.H., Chung S.H., Nasir J.A. and Saba N.U. (2001). Drinking water quality monitoring in Islamabad. National Institute of Health and Korea International Cooperation Agency.
39. Kelin H., Yuang H.F., Hong L. and Robert W.E. (2005). Spatial variability of shallow ground water level, electrical conductivity and nitrate concentration and risk assessment of nitrate contamination in North China plain. *Environment International*, 31, 896-903.
40. Mote Sudhakar P. and Mahajan Hemant A. (2013). Physico-chemical analysis of drinking ground water in Varangaon Region, Dist Jalgaon, Maharashtra, India. *Res. J. Chem. Sci.* Vol. 3(8), 83-85.
41. Yahya M.S., Rahman A. and Abbasi N.H. (2012). Assessment of seasonal and polluting effects on the quality of River Water by using Regression Analysis: A case study of River Indus in province of Sind, Pakistan. *IJEP*. Vol. 2No. pp.10-16. www.ij-ep.org.
42. Asif S., Sajjad N., Sheikh A.A., Shahzad M., Munir T.M., Umar W. and Umar S. (2015). Assessment of water quality for drinking purpose from water coolers of different teaching institutes in Lahore, Pakistan. *IOSR-JESTFT*. Vol. 9., 18-22.
43. Pratiksha Tambekar, Pravin Morey, Batra R.J. and Weginwar R.G. (2012). Quality assessment of drinking water: A case study of Chandrapur District. *J. Chem. Pharm. Res.*, 4(5), 2564-2570.
44. Jena V., Gupta S. and Matic N. (2013). Assessment of Kharoon River Water Quality at Raipur by Physico-chemical parameters analysis. *Asian J. Exp. Biol. Sci.*,

- 4(1). 79-83.
45. Khattak IM and Khattak IM. (2013). Ground water analysis of Karachi with reference to adverse effect on human health and its comparison with other cities of Pakistan. *Jour. Environ. Sci. and Water Resources*. Vol. 2(11), pp.410-418.
46. Jabeen and Shedayi (2011). Physico-Chemical and Bacteriological drinking water quality analysis of Sultanabad Gilgit, Pakistan. *Natural Resources Management: Review and Research in the Himalayan Watersheds II* (Special Publication of NUFU HIMUNET Project, Vol. II, 55-60.
47. Vladeva S., Gatseva P. and Gopina G. (2000). Comparative analysis of results from studies of goiter in children from Bulgarian villages with nitrate pollution of drinking water in 1995 and 1998. *Central European Journal of Public Health*. 8, 179-181.
48. Reddy KSN. (1981). *The essentials of forensic medicine and toxicology*, 5thEdn. Sugune, Hyderabad, 81.
49. Thind GS. (1982). Role of toxic element in human on experiment condition, *J. Air and water pollution control*, 22, 267-270.
50. Burt T.P., Heathwaite A. and Trudgill S.T. (1993). *Nitrate process patterns and management*. John Willey. New York, 444.
51. *Quality Criteria for Water*, U. S. Environmental Protection Agency, Washington, D. C. 20460. (1976).